

www.roemporia-work.com



Catalogue maisons en bois

2015 / 2016



www.roemporia-work.com



idée et solutions




S utile 290 m²



Stephen

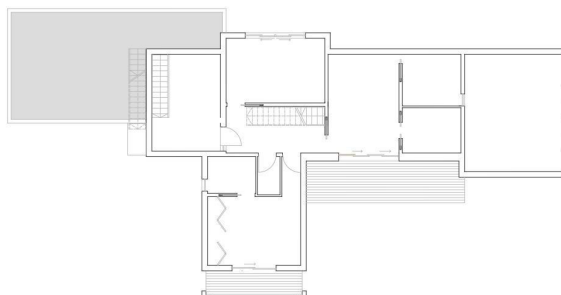
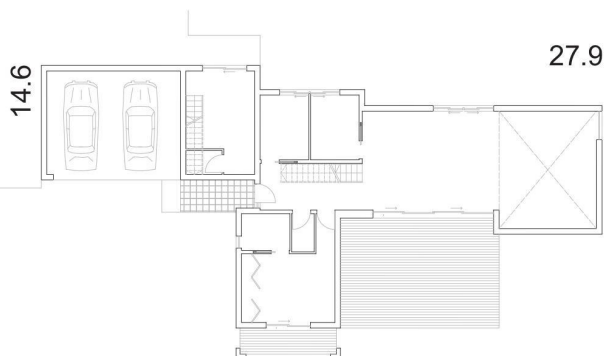


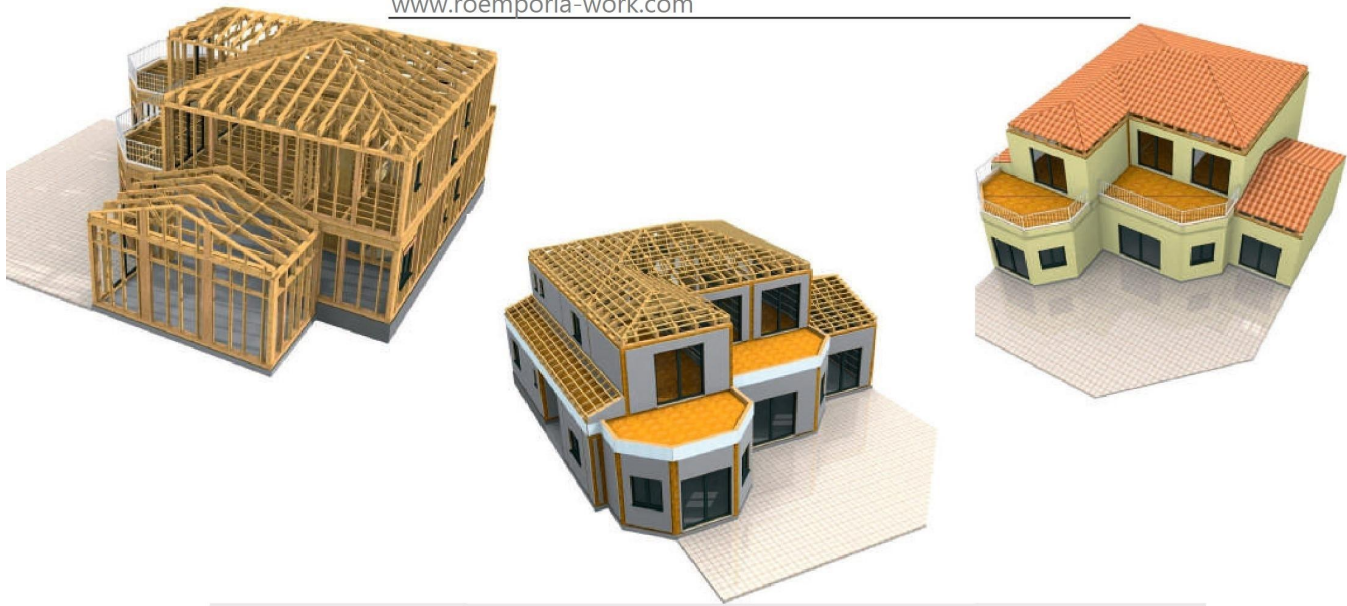

S utile 243 m²



Sylvie

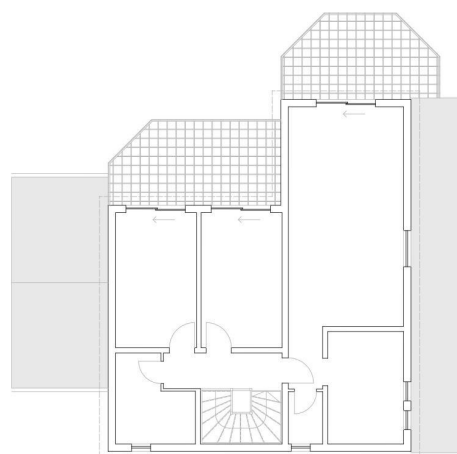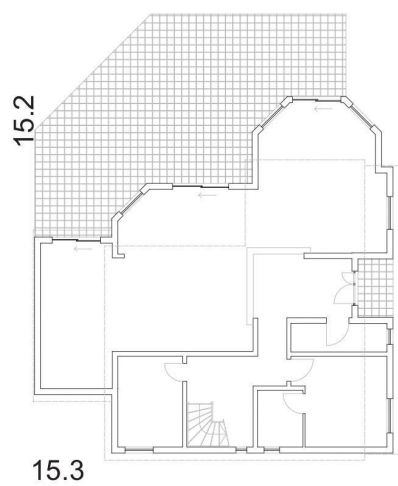




S utile 126,4 m²



Jean Pierre


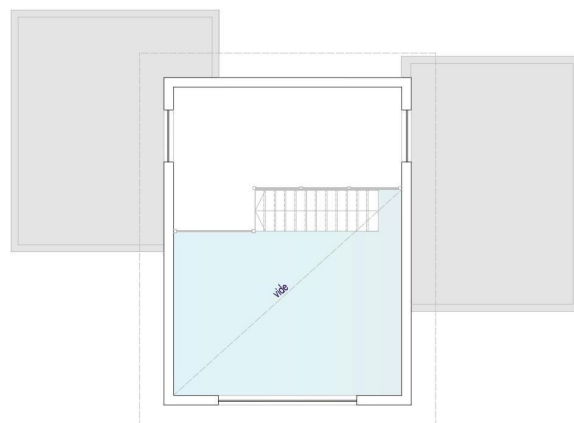




S utile 164,2 m²



Bianca

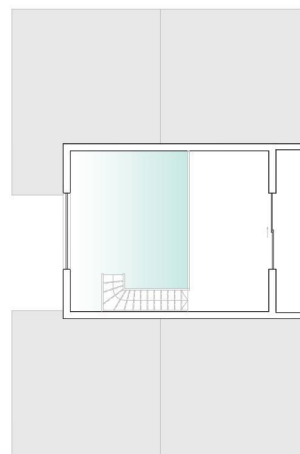
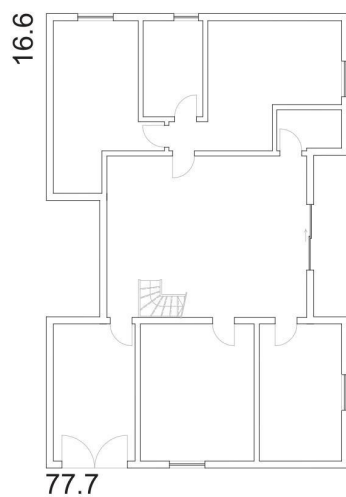




S utile 304,6 m²



Sanda

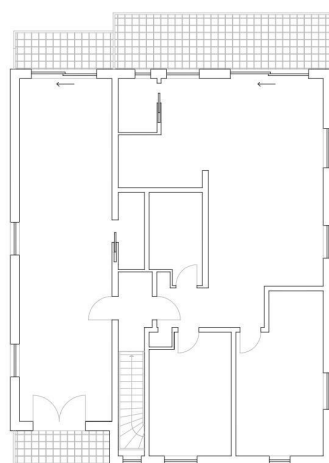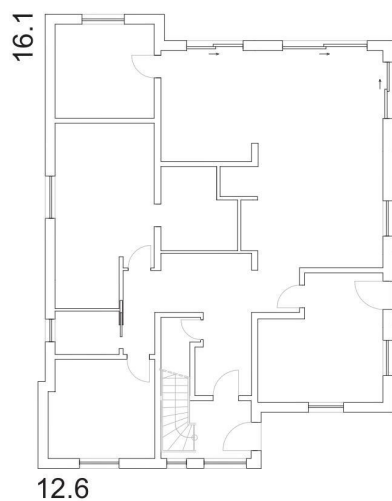




S utile 89,7 m²



Maurice

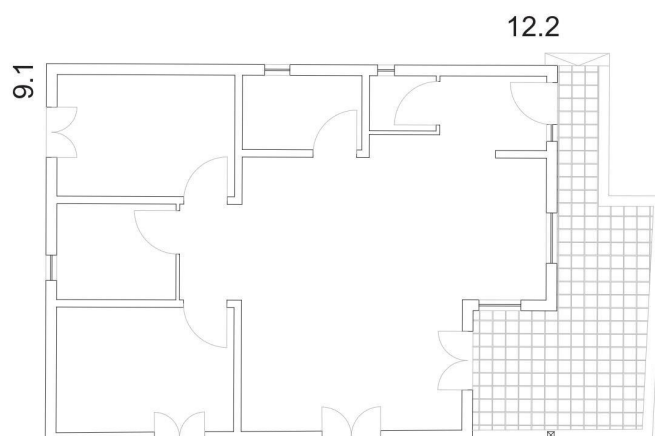





S utile 214,10 m²



Adam


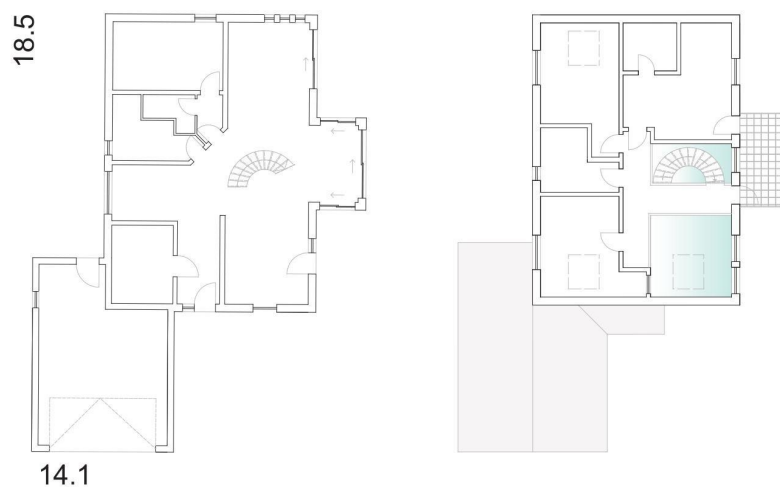


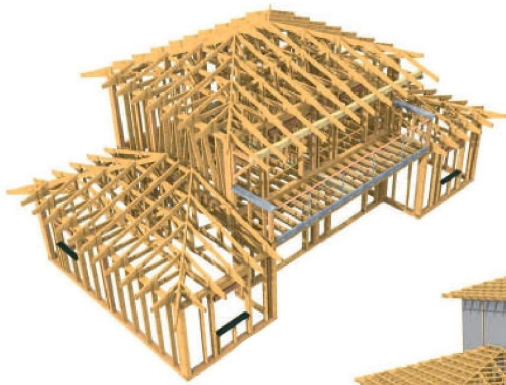

S utile 120,9 m²



Louis

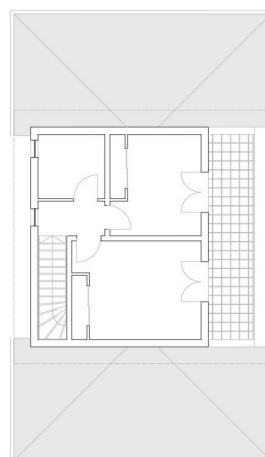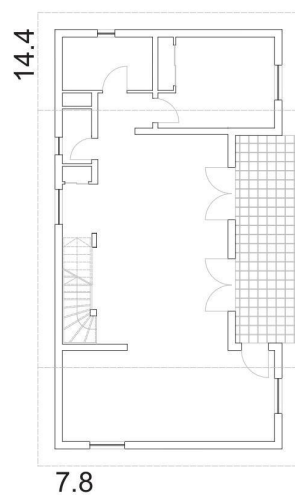





S utile 95,4 m²



Renard

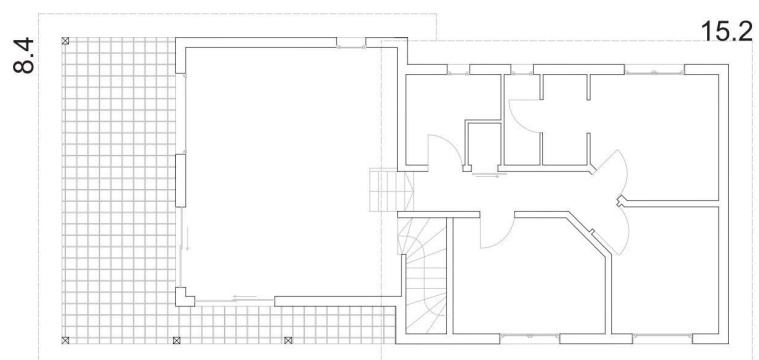


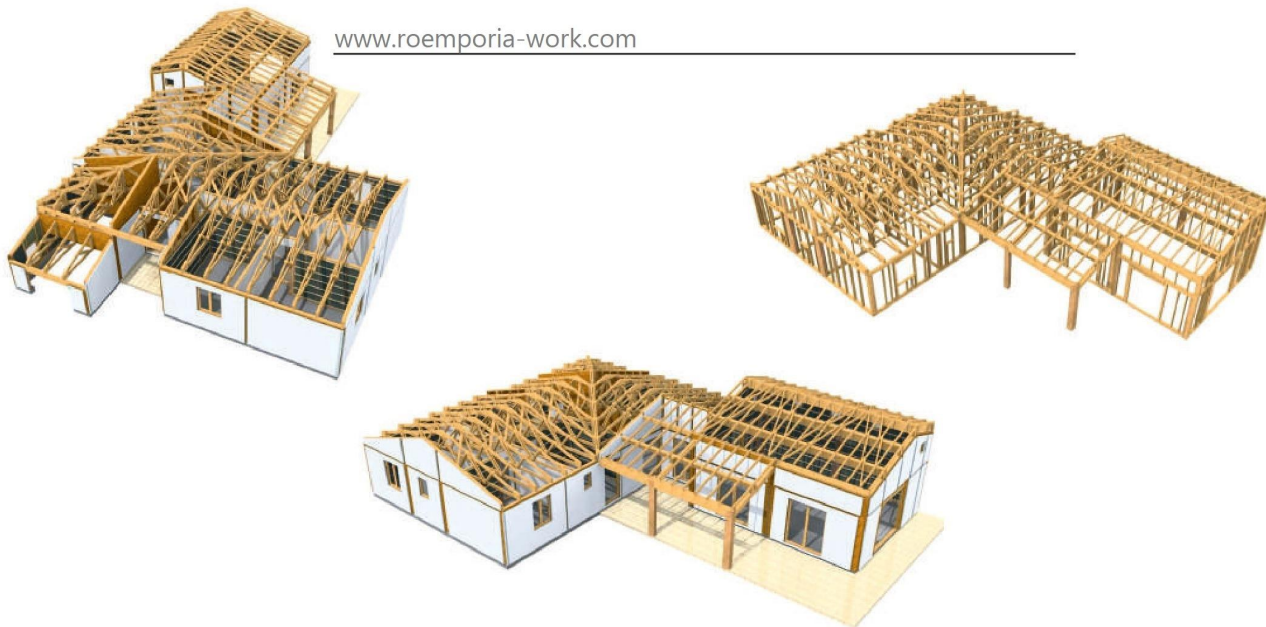

S utile 189,4 m²



Florence


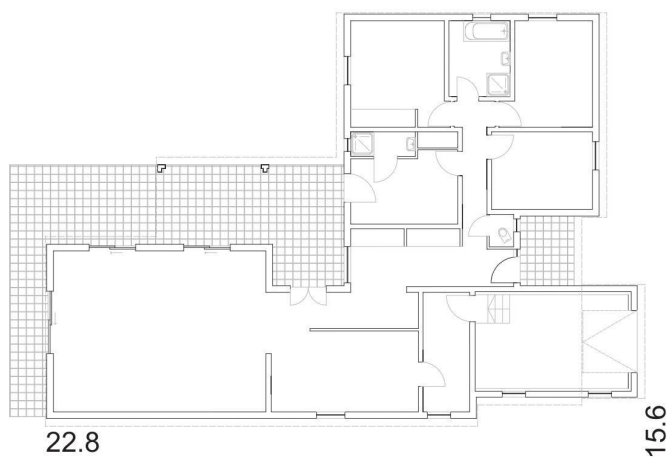




S utile 194 m²



Ovidiu

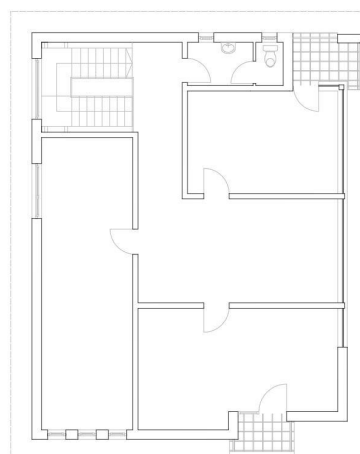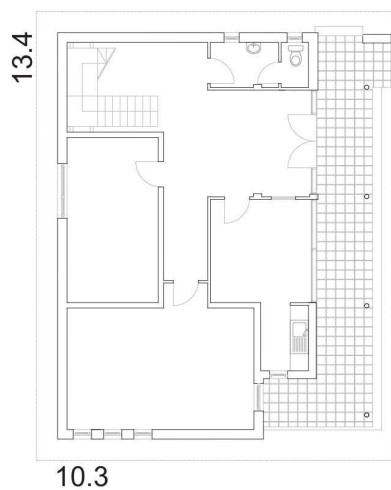




S utile 271,5 m²





Bernard

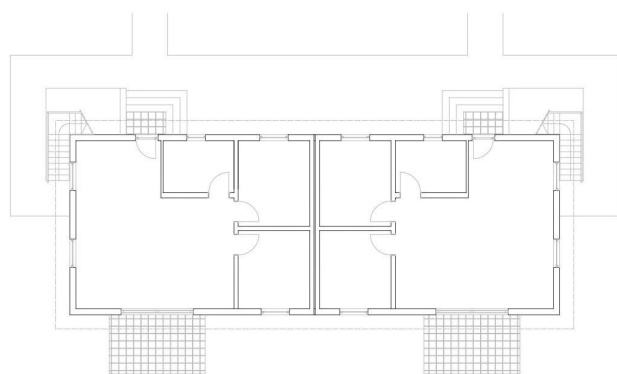

20.7

7.6


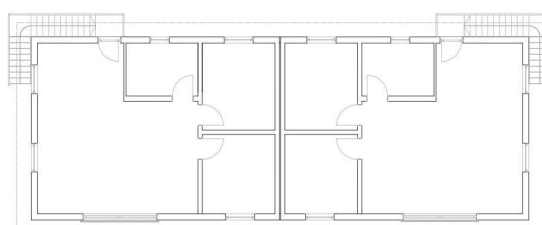


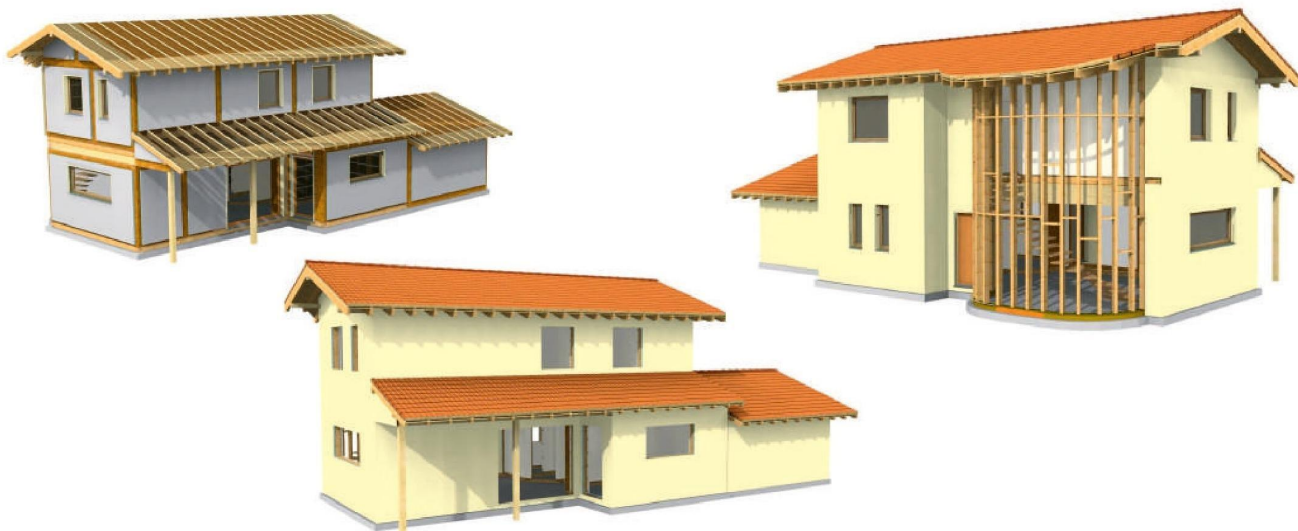


S utile 170,20 m²



Fabio

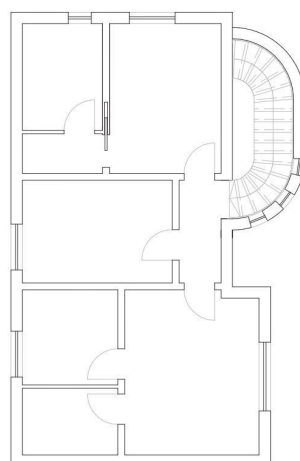
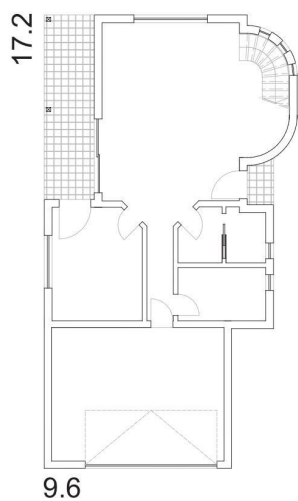


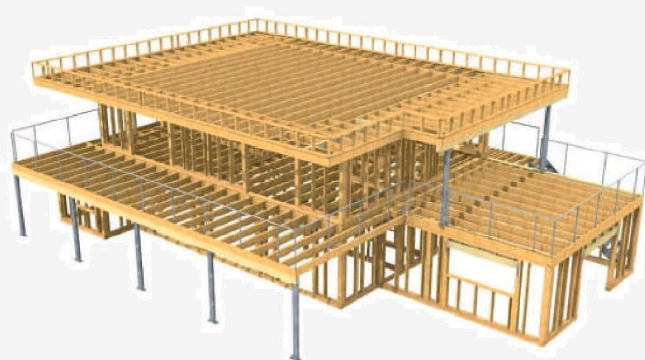

S utile 205,25 m²



Olivier

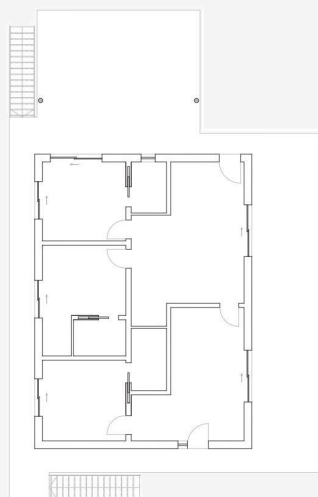
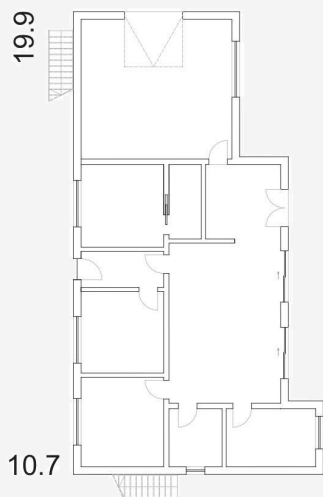




S utile 159 m²



Matteo

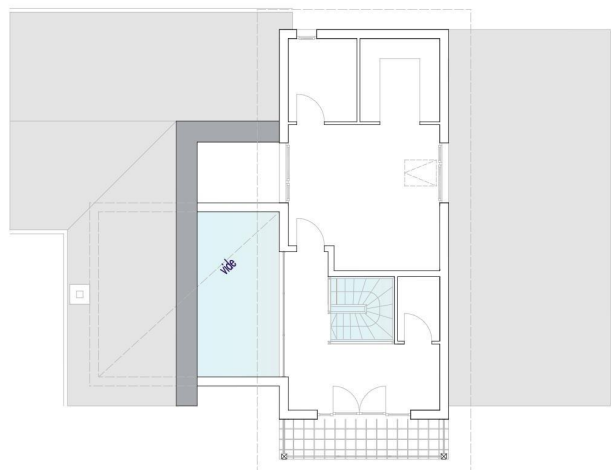
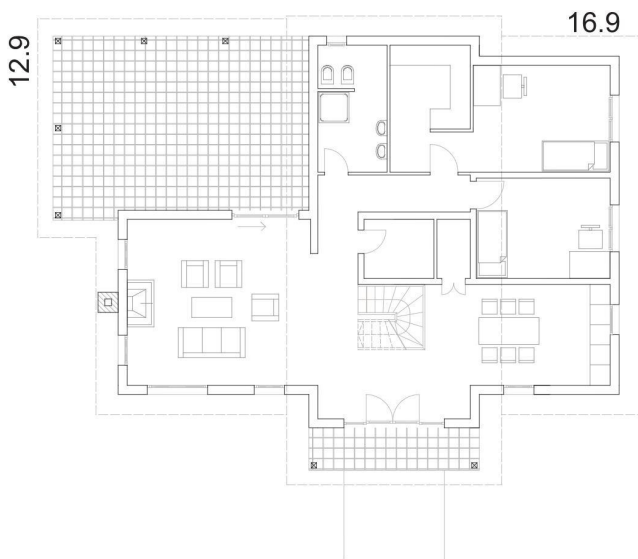




S utile 140,9 m²



Antonio

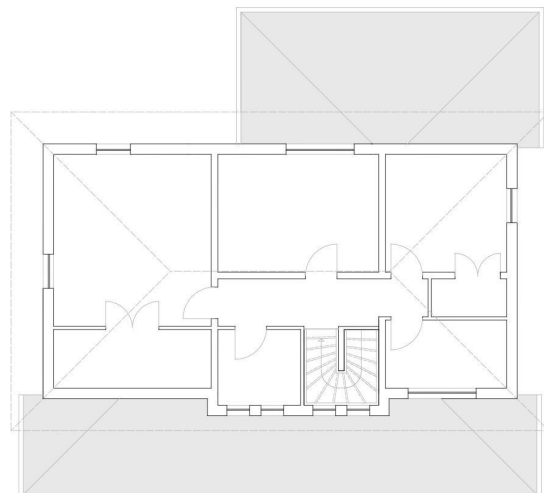
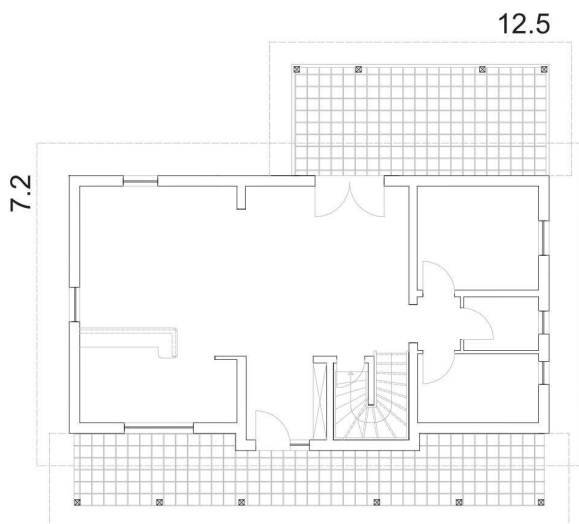





Complexe résidentiel




S utile 137,7 m²

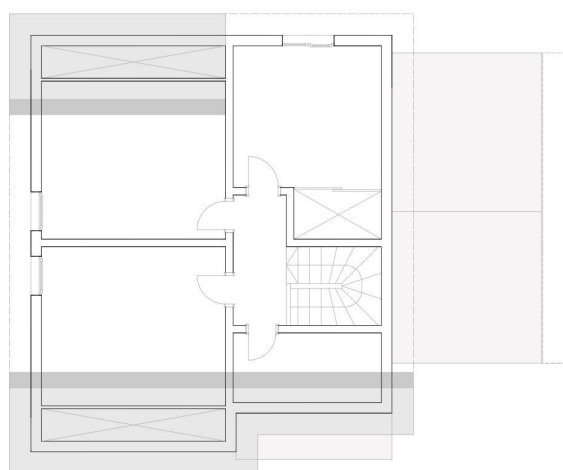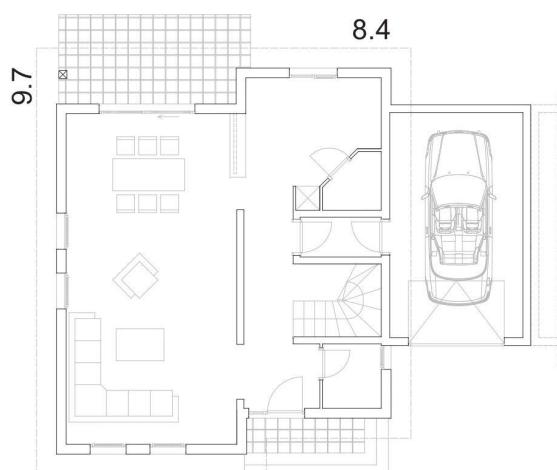

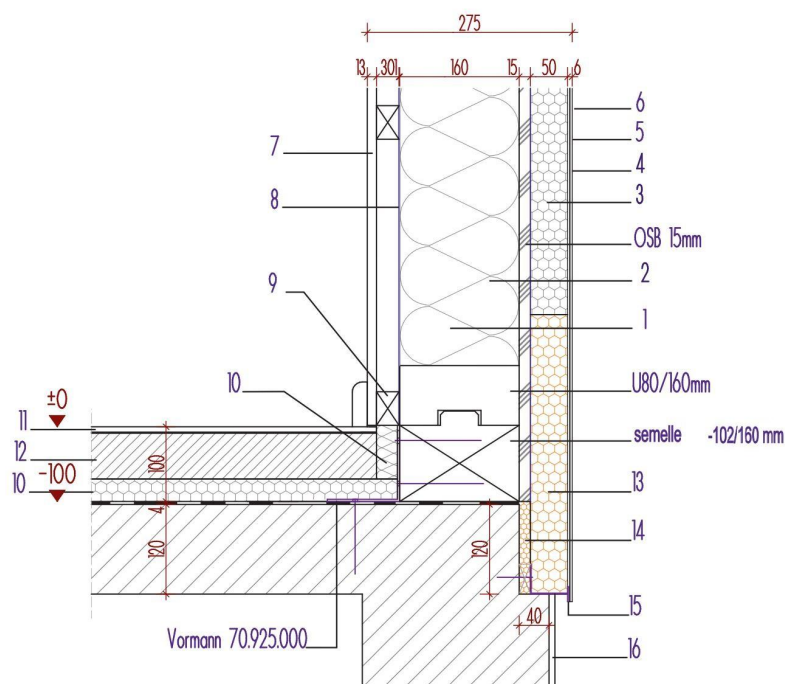

Raccord plaque beton

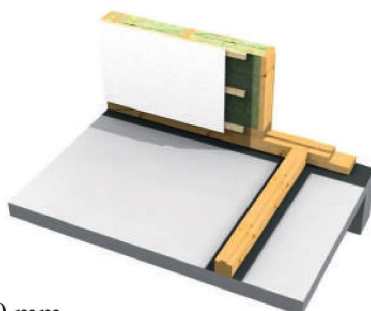

1 - montant 42/160

9 - liteau 30/40 mm

2 - laine de roche 150 mm

10 - isolation 30 mm

3 - polystyrene 50 mm

11 - option - parquet lamine 7,2 mm

4 - enduit 1-ere passe

12 - option - chape flottante 60 mm

5 - treillis en fibre de verre

13 - polystyrene - chantier

6 - crepi decoratif


14 - polystyrene - chantier

7 - plaque au platre 12,5 mm ou optionnel vidiwall


15 - raille de depart

8 - pare-vapeur reflex

16 - finition socle

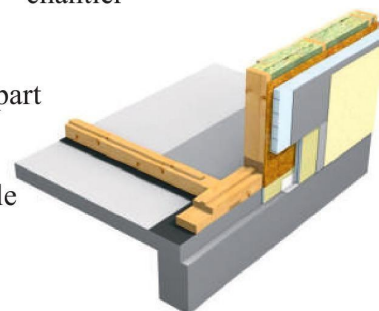


Detail avant-toit

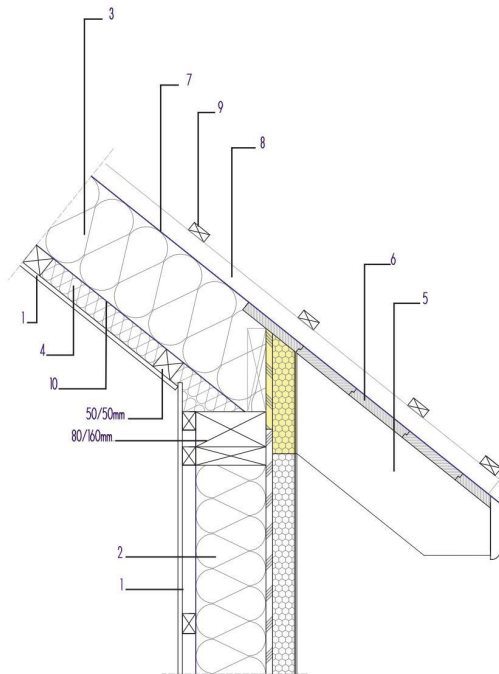

- 1 - plaque au plâtre 12,5 mm
- 2 - laine de roche 150 mm
- 3 - laine de roche 200 mm
- 4 - option - laine de roche 50 mm
- 5 - chevrons 80/200 mm
- 6 - lambris
- 7 - hydroisolation
- impermeabilizzazione
- waterproof
- 8 - contrelattes 40/40 mm
- 9 - lattes 40/20 mm
- 10 - pare-vapeur reflex

Coupe verticale fenetre

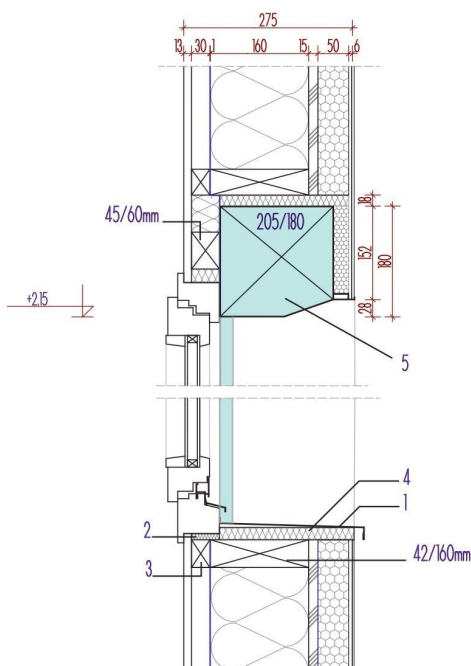

- 1 - goutte d'eau appui
- 2 - isolation 10 mm
- 3 - linteau 30/140 mm
- 4 - polystyrene 20 mm
- 5 - volet roulant